


# TAN.FPS.1050-30 Datasheet

1050 Litre Triple Skinned  
Bunded Steel Tank  
c/w 30min Integral  
Fireproofing

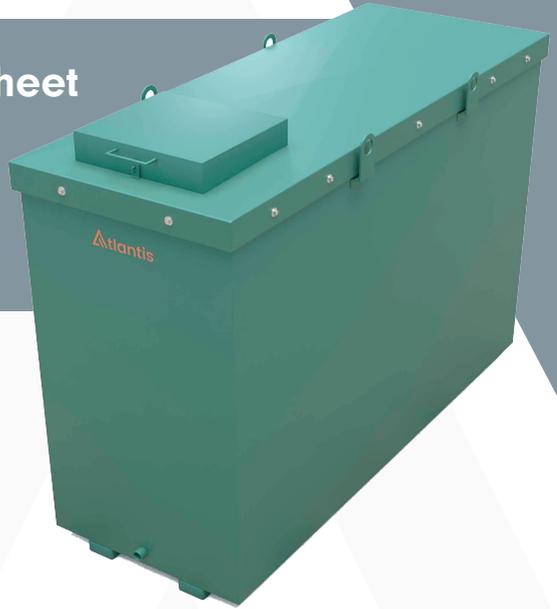

Capacity	1050 Litre
Length	2010mm
Width	790mm
Height*	1370mm
Weight	550kg

## Tank:

A triple skinned bunded tank, the inner tank provides the required storage area, the second tank forms the required bund with capacity for 110% of the total liquid being stored & the third tank provides the housing for the integral fire barrier. The tank is suitable for storage of Diesel, Kerosene & certain other oils. Please check before usage.

## This Tank Complies With:

Oil Pollution Prevention Guidelines  
(England & Wales) 2002 PPG2. BS799 pt5.

## Dimensions:

### Outer tank dimensions:

(L) 2010mm x (W) 790mm x (H) 1370mm\*

\* For the overall height of this tank, allow an additional 115mm (50mm for the base bearers and 65mm for the top box).

### Weight:

550kg

## Recommended Base Size:

(L) 2610mm x (W) 1390mm

## Specification

- ✓ Tough Steel construction
- ✓ 1050 litres (230 galls) capacity
- ✓ 30 min integral fireproof barrier (non absorbent)
- ✓ 1 No. 2" top socket for fill point
- ✓ 2 No. 1 1/2" top socket (for tank & bund)
- ✓ 1 No. 2" tank to bund vent
- ✓ 1 No. 2" bund vent
- ✓ 1 No. 1" bottom outlet socket
- ✓ 1 No. 1" top suction drain socket (plugged)
- ✓ Tank contents gauge (Spiral Float Gauge)
- ✓ Outlet filter kit (optional extra)
- ✓ Mounted on 100mm x 50mm high channel support bearers
- ✓ 10 year warranty



10 Year Tank  
Warranty



High Quality  
British-Made  
Tanks



ISO 9001  
Quality  
Assurance