


## TAN.FPS.2700-60 Datasheet

2700 Litre Triple Skinned  
Bunded Steel Tank  
c/w 60min Integral  
Fireproofing

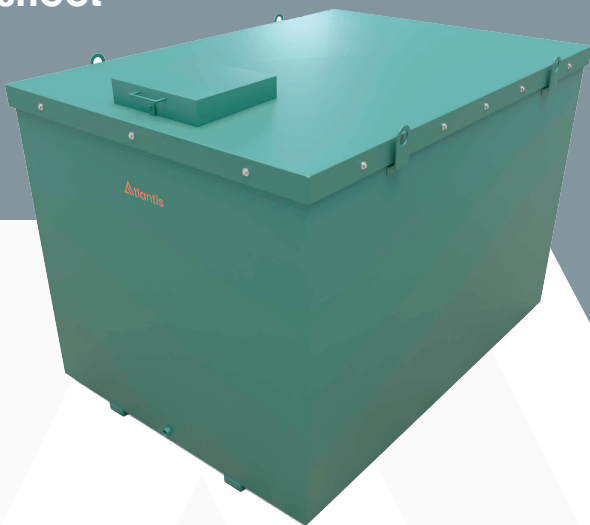

|          |            |
|----------|------------|
| Capacity | 2700 Litre |
| Length   | 2270mm     |
| Width    | 1660mm     |
| Height*  | 1530mm     |
| Weight   | 860kg      |

### Tank:

A triple skinned bunded tank, the inner tank provides the required storage area, the second tank forms the required bund with capacity for 110% of the total liquid being stored & the third tank provides the housing for the integral fire barrier. The tank is suitable for storage of Diesel, Kerosene & certain other oils. Please check before usage.

### This Tank Complies With:

Oil Pollution Prevention Guidelines  
(England & Wales) 2002 PPG2. BS799 pt5.

### Dimensions:

#### Outer tank dimensions:

(L) 2270mm x (W) 1660mm x (H) 1530mm\*

\* For the overall height of this tank, allow an additional 115mm (50mm for the base bearers and 65mm for the top box).

#### Weight:

860kg

### Recommended Base Size:

(L) 2870mm x (W) 2260mm

### Specification

- ✓ Tough Steel construction
- ✓ 2700 litres (594 galls) capacity
- ✓ 60 min integral fireproof barrier (non absorbent)
- ✓ 1 No. 2" top socket for fill point
- ✓ 2 No. 1 1/2" top socket (for tank & bund)
- ✓ 1 No. 2" tank to bund vent
- ✓ 1 No. 2" bund vent
- ✓ 1 No. 1" bottom outlet socket
- ✓ 1 No. 1" top suction drain socket (plugged)
- ✓ Tank contents gauge (Spiral Float Gauge)
- ✓ Outlet filter kit (optional extra)
- ✓ Mounted on 100mm x 50mm high channel support bearers
- ✓ 10 year warranty



10 Year Tank  
Warranty



High Quality  
British-Made  
Tanks



ISO 9001  
Quality  
Assurance