

TAN.LUI-2502 Datasheet

2350 Litre Steel Bunded Imperium®
Lube Oil Tank



Capacity	2350 Litre
Length	1830mm
Width	1250mm
Height	1250mm
Weight	Dry (empty): 372kg Wet (full): 2423kg

General information

A 2350 litre steel bunded lube oil tank designed for the safe and efficient storage of lubricants in workshops, garages, and industrial facilities. Made with Imperium® Technology.

Imperium® Technology

Atlantis Tanks' own precision tank design combined with a highly-efficient manufacturing approach. The result is a well-engineered, durable and compliant lube oil storage solution. Patent Pending.

Suitable for

Lube oils, heating oil, HVO, diesel and other compatible liquids (please check before usage).

Tank Data

Outer tank dimensions:

(L) 1830mm x (W) 1250mm x (H) 1250mm

Inner tank dimensions:

(L) 1700mm x (W) 1190mm x (H) 1248mm

Brimful capacity: 2502 litres

Nominal capacity: 2377 litres

Usable capacity (c/w OPV): 2301 litres

Materials & Compliance

- ✓ Manufactured from structural steel grade S275 JR (BS EN10025-2:2004)
- ✓ Meets BS 799 pt5 standards for steel oil storage tanks
- ✓ Complies with the Control of Pollution (Oil Storage) (England) Regulations 2001 and devolved equivalents

Connections

- ✓ 1 x 1.5" bund socket
- ✓ 1 x 2" tank to bund vent
- ✓ 1 x 2" bund to atmosphere vent
- On fittings plate:**
- ✓ 1 x 2" fill point c/w drip cap & chain
- ✓ 2 x 2" tank sockets
- ✓ 1 x 1.5" tank socket
- ✓ 1 x 1" top suction drain port (internal suction pipe)
- On tank front:**
- ✓ Alarm Mounting Plate

Specification

- ✓ Removable fittings plate
- ✓ Full-length bearers for tank stability
- ✓ Hose reel and drip tray mounting plates fitted as relevant
- ✓ Lifting eyes for safe manoeuvring
- ✓ Small tin of "touch-up" paint supplied as standard



10 Year Tank
Warranty



High Quality
British-Made
Tanks



Bunded Steel
Tank

TAN.LUI-2502 Datasheet

2350 Litre Steel Bunded Imperium® Lube Oil Tank

Warranty

10 year warranty subject to T&Cs. Each tank supplied with a warranty manual.

Base

Install on a strong, level, impermeable base extending beyond the tank footprint, in line with the Control of Pollution (Oil Storage) (England) Regulations 2001 and devolved equivalents.

Exterior Finish

- ✓ 2 coats of specially formulated anti-rust coating for maximum protection
- ✓ Standard colour: Grey RAL 7015 (other finishes available on request)

You may also need

CONTENTS GUAGES & ALARM OPTIONS



Clock Face Tank Contents Gauge



Spiral Float Tank Level Contents Gauge



Apollo Ultrasonic Tank Contents Gauge



Battery Oil Tank High Level Alarm

AIR-OPERATED PUMP OPTIONS



1:1 Air Operated Oil Pump and Air Regulator



3:1 Air Operated Oil Pump and Air Regulator



5:1 Air Operated Oil Pump and Air Regulator



1:1 Air Operated Oil Pump and Air Regulator with 3m Hose & Digital Nozzle



3:1 Air Operated Oil Pump and Air Regulator with 15m Hose Reel & Digital Nozzle

TANK SERVICE & SECURITY



2" Overfill Limiter for Steel Tanks



Grey Metal Tank Paint - 1 litre



Extra Top Coat of Paint in Grey RAL 7015



Tel: 0330 999 1100


Email: sales@atlantistanks.co.uk

www.atlantistanks.co.uk

TAN.LUI-2502 Datasheet

2350 Litre Steel Bunded Imperium® Lube Oil Tank

Bird's Eye View - Generic for all Steel Lube Oil Tanks

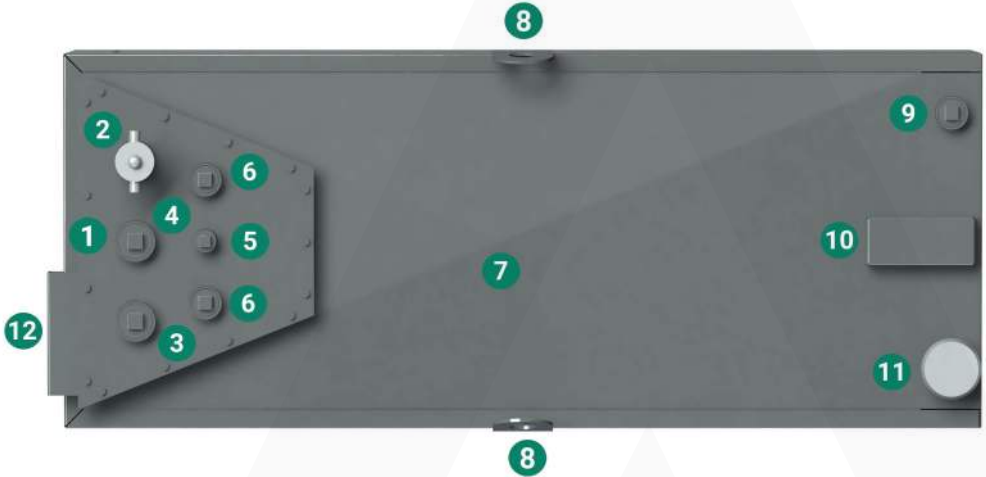

1. Imperium® Lube Oil Tank Fitting Plate
2. 2" Aluminium Fill Point with Aluminium Drip Cap and Chain
3. 2" Socket for Air-Operated Pump Kit Options
4. Spare 2" Socket
5. 1" Suction Drain Port with Internal Suction Tube
6. 2 x 2" Sockets for content level gauge & spare
7. Pitched roof for water run off
8. 2 x lifting eyes
9. 1.5" bund socket for optional bund alarm probe
10. 2" tank to bund vent
11. 2" bund to atmosphere vent with aluminium vent cap
12. Gauge/Alarm Mounting Plate



Tel: 0330 999 1100

Email: sales@atlantistanks.co.uk

www.atlantistanks.co.uk